



## Explosion Proof Industrial Lithium Batteries Lithium Ion Battery Pack

### Our Product Introduction

for more products please visit us on [rechargeable-liionbattery.com](http://rechargeable-liionbattery.com)

#### Basic Information

- Place of Origin: Changsha, China
- Brand Name: HYZZ
- Certification: ISO9001, CE, CB, UN38.3
- Model Number: HY00057
- Packaging Details: foam, wooden box / foam, carton, tray
- Delivery Time: 22 days
- Payment Terms: L/C, T/T
- Supply Ability: 10,000 PCS per month



#### Product Specification

- Name: Industrial Lithium Batteries
- Model: 9.6V 6Ah
- L X W X H: 82mm\*54mm\*72mm
- Working Temperature: Under -40°C Working Environment
- Charge Cut-off Voltage: 10.95V
- Maximum Operating Current: 4000mA
- Highlight: **industrial lithium ion battery ,  
industrial grade battery**

## Product Description

### Explosion Proof Industrial Lithium Batteries Lithium Ion Battery Pack

Model: 9.6V 6Ah

Specification: 82mm\*54mm\*72mm

Parameters: -20°C ~ 60°C working environment, charge cut-off voltage 10.95V, discharge cut-off voltage 7.35V, working current 200mA, maximum operating current 4000mA, charging current 1200mA, weight 550g, PVC blue heat shrinkable film

Applications: Measuring instruments, meteorological instruments, power grids, engineering equipment

Features: Safe and reliable, non-explosive under piercing, non-incinerated under over voltage

No memory effect, more than 2000 times cycle-life

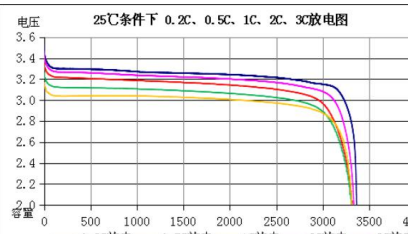
Perfect for energy storage and power tool use

About 1/3 the weight of lead-acid batteries

Have no environment pollution

Long cycle-life, high capacity

High energy density

		Number	HY00057
		Version	A0
	<b>HYLF/9.6/6-001</b> Battery pack specification	Date	2019-5-7
<b>1 Basic characteristics</b>		Product picture	
Product name	Industrial lithium battery		26650-3.2V3AHBattery: lithium iron phosphate, 26650-3.2V3AH
product code	HYLF/9.6/6-001		
L x W x H	82mm*54mm*72mm		
Rated voltage	9.6VSeries structure		
Rated Capacity	6Ah		
Serialization	2P3S		
Internal resistance	≤100mΩ		
Discharge cutoff voltage	6.9V	Shell color	
Charging protection voltage	10.8V	<input type="checkbox"/> Sub black	
Max.charging voltage	10.95V	<input type="checkbox"/> Bright gray	
Max. charging current	3A	<input type="checkbox"/> +Fruit green + bright gray two-color	
Maximum discharge current	4A	<input type="checkbox"/> White	
Peak current	10±2A 2S	<input checked="" type="checkbox"/> Blue thermoplastic film	
Rated discharge current	0.2A	Charging and discharging interface	
		<input type="checkbox"/> Wall terminal	
		<input type="checkbox"/> Anderson	
		<input type="checkbox"/> Navigation plug	
		<input checked="" type="checkbox"/> Positive and negative lines	
		<input type="checkbox"/> Pole	
		<input type="checkbox"/> Hardware contact	
Charging method	CC/CV		Discharge curve:
weight	550g		
Operating temperature	Charging	0 45	
	Discharge	-20 55	
60-80%SOC , 2 Storage temperature	-10 35		
60-80% SOC storage, need to recharge every 2 months			
C1 Cycle life	1200 Times		
Cycle life			
price	RMB:¥ 00.00		
Delivery period	25 Working day		



**Hunan Pinsheng Energy Technology Co., LTD.**



15616151876



info@pinshengenergy.com



rechargeable-liionbattery.com

NO. 259, Lixiang East Road, Xiangfeng Technology Industry Park, Changsha City, Hunan, China.