




High Voltage Rechargeable Batteries Lifepo4 Motorcycle Battery 1500 Times

Our Product Introduction

for more products please visit us on rechargeable-liionbattery.com

Basic Information

- Place of Origin: Changsha, China
- Brand Name: HYZZ
- Certification: ISO9001, CE, CB, UN38.3
- Model Number: HY00085
- Packaging Details: foam, wooden box / foam, carton, tray
- Delivery Time: 22 days
- Payment Terms: L/C, T/T
- Supply Ability: 10,000 PCS per month

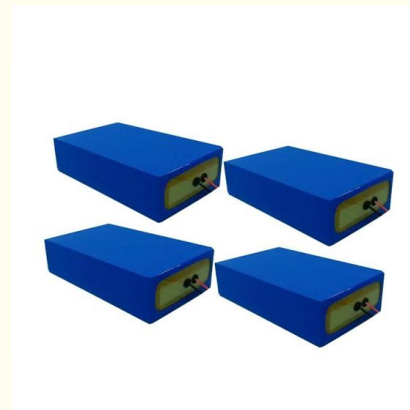

Product Specification

- Name: LifePO4 Lithium Battery
- Model: 24V 20Ah
- L X W X H: 264mmX164mmX64mm
- Application: Wheelchairs And Scooters
- C1 Cycle Life Cycle Life: 1500 Times
- Charging Method: CC/CV
- Highlight: lithium iron phosphate battery,
lifepo4 rechargeable battery

Product Description

High Voltage Rechargeable Batteries Lifepo4 Motorcycle Battery 1500 Times

Model: 24V20Ah

Dimension: 264mmX164mmx64mm

Features: iron lithium 81160227/8S; charge cut-off voltage:29.2V; discharge cut-off voltage: 20V; working current:10A; weight:5.6KG

How to choose a high quality lithium battery:

- 1, A grade battery cell, with full capacity for each battery cell;
- 2, BMS: water proof, anti static, over current protection, over voltage protection, with sealed case;
- 3, IP55 water proof case, plastic or steel case available by customer's requirement. MOQ: 1pieces.

In order to guarantee A grade battery cell:

- 1, High grade raw material;
- 2, 12hours & 3 cycles charging/discharging test.

Applications :

- ◆ Wheelchairs and scooters
- ◆ Solar/wind energy storage
- ◆ Back-up power for small UPS
- ◆ Golf trolleys & buggies
- ◆ Electric bikes

		Number	HY00085
		Version	A0
	HYLF/24/20-001	Date	2019-5-7
	Battery pack specification		
1 Basic characteristics		Product picture	
Product name	Industrial lithium battery		
product code	HYLF/24/20-001		
L x W x H	264mmX164mmx64mm		
Rated voltage	24VSeries structure		
Rated Capacity	20Ah		
Serialization	8S		
Internal resistance	≤100mΩ		
Discharge cutoff voltage	18.4V		
Charging protection voltage	28.8V		
Max.charging voltage	29.2V		
Max. charging current	10A		
Maximum discharge current	10A		
Peak current	20±2 2S		
Rated discharge current	5A	<input checked="" type="checkbox"/> Blue thermoplastic film	
		Charging and discharging interface	
		<input type="checkbox"/> Wall terminal	
		<input type="checkbox"/> Anderson	
		<input type="checkbox"/> Navigation plug	
		<input checked="" type="checkbox"/> Positive and negative lines	
		<input type="checkbox"/> Pole	
		<input type="checkbox"/> Hardware contact	
Charging method	CC/CV		
weight	5.6Kg		
Operating temperature	Charging	0 45	
	Discharge	-20 55	
60-80%SOC , 2 Storage temperature	-10 35		
60-80% SOC storage, need to recharge every 2 months			

C1 Cycle life	1500 Times
Cycle life	
price	RMB:¥ 00.00
Delivery period	25 Working day



Hunan Pinsheng Energy Technology Co., LTD.



15616151876



info@pinshengenergy.com



rechargeable-liionbattery.com

NO. 259, Lixiang East Road, Xiangfeng Technology Industry Park, Changsha City, Hunan, China.