



Pinsheng 5Ah/10Ah/20Ah/40ah/60ah/80Ah/100AH/160AH Nominal Capacity Flexible Size 3.2v 100ah Lifepo4 Battery

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Delivery Time:
- Payment Terms:
- Supply Ability:

Our Product Introduction

for more products please visit us on rechargeable-liionbattery.com

pe2246 1PCS 15-25 work days T/T, Western Union, MoneyGram 30000+set+per month

hunan,china

ce

pinsheng Energy



Product Specification

- Product Name:
- Model Number:
- Capacity:
- Nominal Voltage:
- Storage Type:
- Sealed Type:
- Application:
- Cycle Life:
- Highlight:

LifePO4	Lithium	Battery

```
Pe2246
280ah
```

3.2V

- Standard
- Sealed
- Solar Energy Storage Systems
- 3500times
- 3500 times 3.2v 100ah Lifepo4 Battery, Pinsheng Rechargeable Li Ion Battery





Company Display



Hunan Pinsheng Energy Technology Co.,LTD





CERTIFICATE







Key Features of Pinsheng Lithium Battery

- 1. Long life, large capacity and good shock resistance
- 2. Low self discharge and good discharge performance at low temperature
- 3. Strong charing acceptace and quick- charging capability
- 4. Storage over- discharge resistance and charge retention
- 5. Maintenance-free and no acid or water for mantence in usage
- 6. Excellent large current discharge performance, and have obvious

advantages in startup and climing

- 7. High temperature performance
- 8. Environmental friendly
- 9. Lighter weight smaller size

10.Good service

Specifications:

Items	Specifications

Nominal Voltage	3.2V
Nominal Capacity	280Ah
Standard Charge Current	0.2C-0.5C
Max. Charge Current	1C
Continuous Discharge Current	1C
Peak Discharge Current	2C
Charge Cut-off Voltage	3.9V
Discharge Cut-off Voltage	2V
Inner Resistance	\leq 0.3m Ω (At 0.2C rate, 2.0V cut-off)
Weight	5.5kg
Dimension	Length: 205mm Width: 175mm Thickness: 72mm
Operating Temperature	Charging: 0°C ~ 45°C Discharging: -20°C ~ 55°C


Storage Temperature	optimal store temperature of 23 \pm 5°C for long term storage
Life Cycle	≥3500 times (100% DOD till 80% of initial capacity at 0.2C rate, IEC Standard)

Gravimetric Energy Desity(Wh/kg)	110-190	20-50
Volumetric Energy Density(Wh/Kg)	170-310	60-90
Cycle Durability	>3000 cycles	300-500 cycles
Self discharge Rate	<2%	<4%
Discharge Rate	10C	1C
Installation	Smallsize and light weight ,about40% of the weight of a comparable elead acid battery	Big and heavy, difficult to install
Maintenance	No need for regular maintenance	Regular manintenance staff required
Enviromental Protection	Freee of hearby metals, safe and pollition free recycling utilization rate is high	Containing hearvily pollutiong and toxic substances ,such as lead,arsenic, mercury
Superior safety	lihtium Iron phosphate chemistry reduces the ris of explosion of combustion	









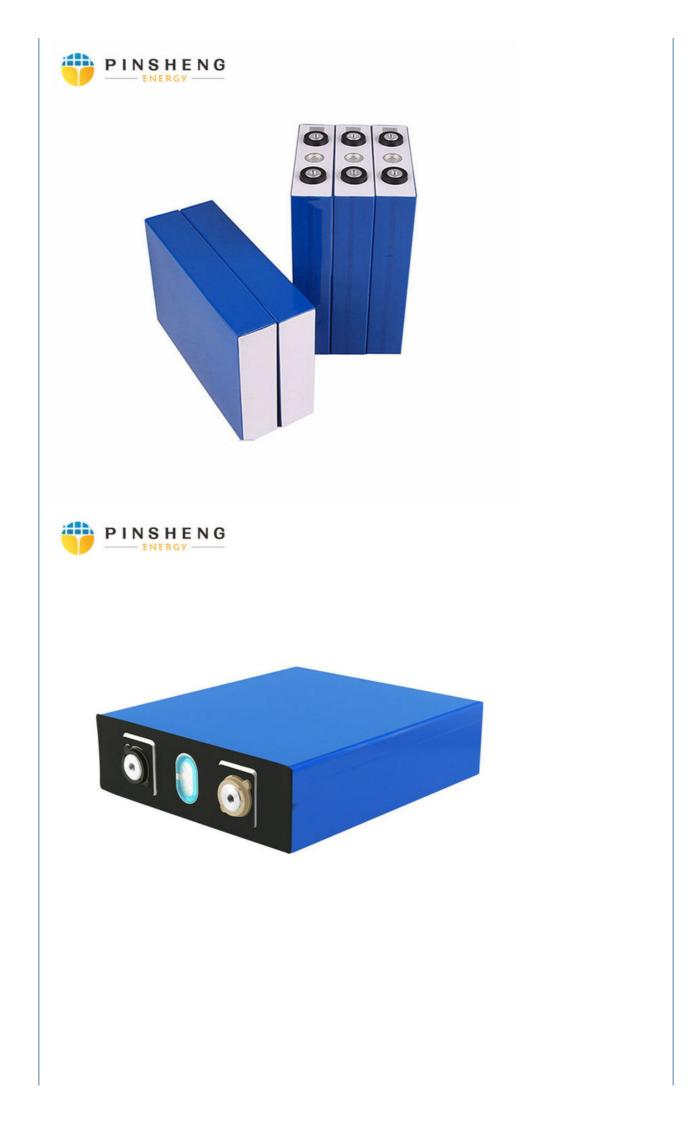



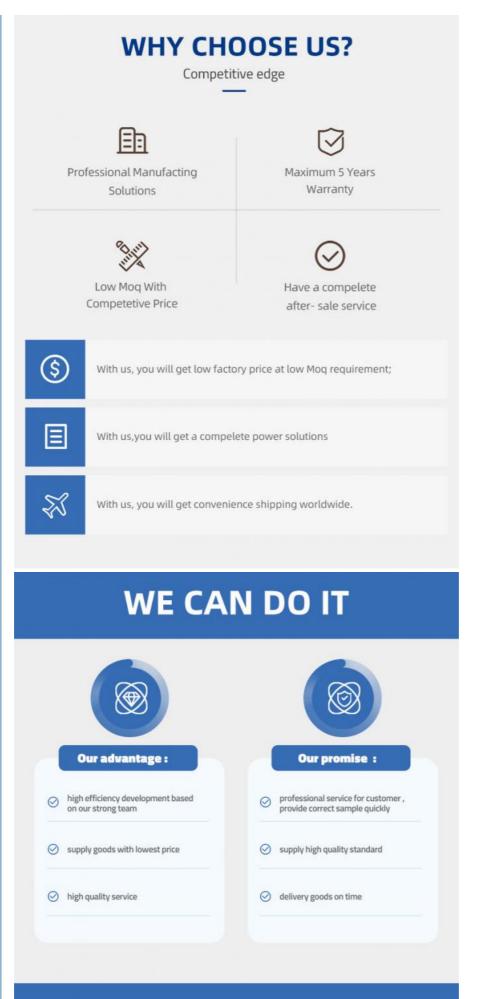

PAYMENT&LOGISTICS

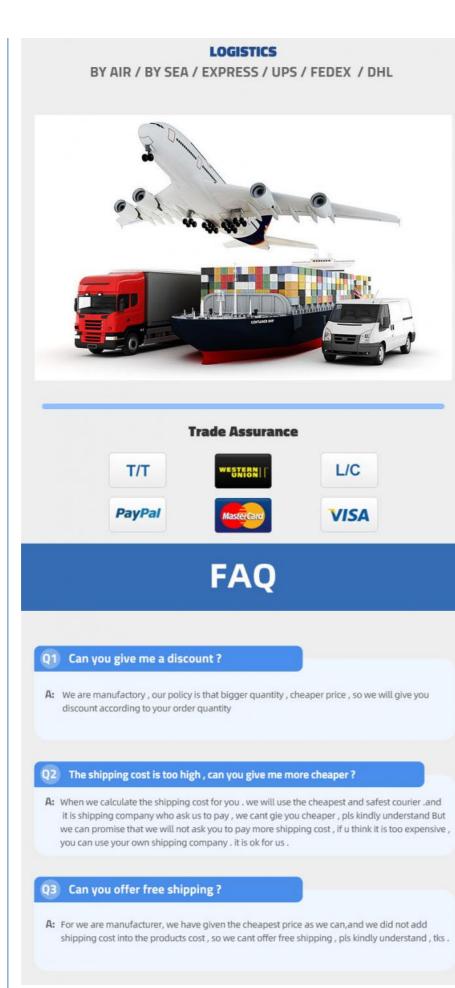

Contact Us



Sofia Tse Sales Manager

Liver Die

Hunan Pinsheng Energy Technology Co.,LTD



2/F,Building 4,Xiangfeng High-Tech Industrial Park,Changsha County, Changsha City, Hunan Province M.P.:+86-15675831763/13307465388 P.C: 410100 E-Mail: sofiatse210816@gmail.com





info@pinshengenergy.com

@ rechargeable-liionbattery.com

NO. 259, Lixiang East Road, Xiangfeng Technology Industry Park, Changsha City, Hunan, China.